

TCB 1-200A Series

Features

1. Size: According to customer's installation requirements
 2. Magnetic core UI value: 10ui-80000ui
 3. Operating frequency: 50Hz/60Hz
 4. Bias current: 1-200A
 5. Compliant with: UL, 3C,
 6. Compliance: RoHS, REACH
- ★ Customizable According to Customer Requirements

Application areas

1. Power Supply: PD Power Supply, Outdoor Power Supply, Mobile Phone /Laptop Charger, LED Driver Power Supply, Computer Switching Power Adapter.
2. Household Appliances: TV, air Conditioner, Refrigerator, Audio Equipment, Lighting Equipment.
3. Industrial and Power Equipment: Charging Piles, High-Frequency Inverter Welding Machines, UPS Uninterruptible Power Supplies, Photovoltaic Inverters, and Wind Power Converters.

TCB 1-200A 系列


功能特性

- 1.尺寸：根据客户安装需求
 - 2.磁芯 ui 值：19ui-125ui
 - 3.工作频率：2MHz MAX
 - 4.偏置电流：1-200A
 - 5.符合：UL,3C
 - 6.符合：RoHS
- ★可根据客户要求定制


应用领域

1. 电源：PD 电源、户外电源、手机/笔记本充电器、LED 驱动电源、电脑开关电源适配器。
2. 家用电器：电视、空调、冰箱、音响、照明设备。
3. 工业与电力设备：充电桩、高频逆变电焊机、UPS 不间断电源、光伏逆变器、风电变流器。

Shape and Dimensions(dimensions are in mm) 外观与尺寸

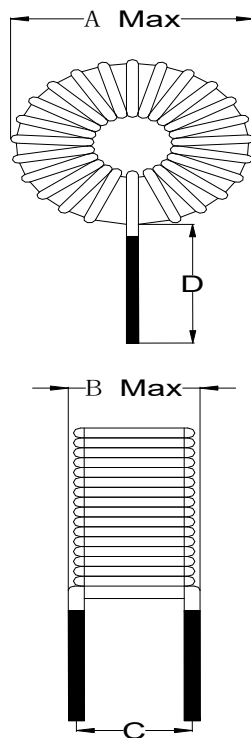

立式

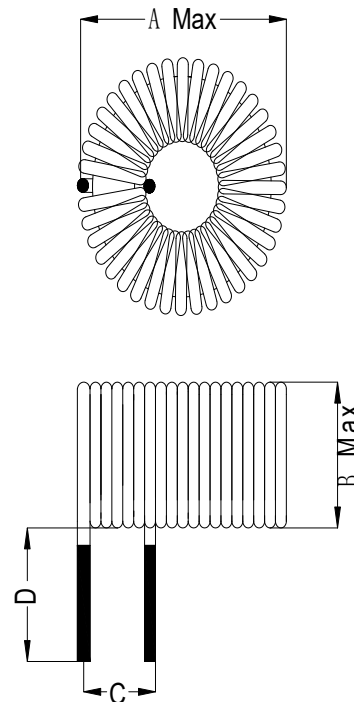

卧式

Spec 规格	A	B	C	D	Shape 形状	Operating Frequency 工作频率	Bias current: 倒置电流
TC040125	14.0	7.0	4.0	10.0	卧式	2MHz MAX	1-200A
TC044125	15.0	8.0	6.0	10.0	立式	2MHz MAX	1-200A
TC050125	17.5	9.0	6.5	10.0	立式	2MHz MAX	1-200A
TC065040	22.0	11.5	7.0	10.0	卧式	2MHz MAX	1-200A
TC080125	25.5	13.0	10.0	10.0	立式	2MHz MAX	1-200A
TC090060	27.5	13.0	10.0	10.0	立式	2MHz MAX	1-200A
TC106125	32.0	15.0	14.0	5.0	立式	2MHz MAX	1-200A
TC130125	40.5	29.0	24.5	6.0	立式	2MHz MAX	1-200A
TC135090	42.0	20.0	13.0	10.0	立式	2MHz MAX	1-200A
TC141075	43.0	21.0	14.0	8.0	立式	2MHz MAX	1-200A
TC157060	48.0	24.0	20.0	10.0	立式	2MHz MAX	1-200A
TC184075	52.0	22.5	15.0	20.0	卧式	2MHz MAX	1-200A
TC200125	58.0	22.0	18.0	10.0	立式	2MHz MAX	1-200A

<http://www.easehouse.com.hk>