

ET Series

Features

1. Size: According to customer's installation requirements
 2. Inductance range: 0.2MH-150MH
 3. Current range: 0.2A-6A
 4. Operating voltage: 80V-280V
 5. Compliant with: UL, VDE, 3C, CQC
 6. Compliance: RoHS, REACH
- ★ Customizable According to Customer Requirements

Application areas

1. Power Supply: PD Power Supply, Outdoor Power Supply, Mobile Phone /Laptop Charger, LED Driver Power Supply, Computer Switching Power Adapter.
2. Household Appliances: TV, air Conditioner, Refrigerator, Audio Equipment, Lighting Equipment.
3. Industrial and Power Equipment: Charging Piles, High-Frequency Inverter Welding Machines, UPS Uninterruptible Power Supplies, Photovoltaic Inverters, and Wind Power Converters.

ET 系列


功能特性

- 1.尺寸：根据客户安装需求
 - 2.电感量范围：0.2MH-150MH
 - 3.电流范围：0.2A-6A
 - 4 工作电压：80V-280V
 - 5 符合：UL,VDE,3C,CQC
 - 6.符合：RoHS ,REACH
- ★可根据客户要求定制


应用领域

1. 电源：PD 电源、户外电源、手机/笔记本充电器、LED 驱动电源、电脑开关电源适配器。
2. 家用电器：电视、空调、冰箱、音响、照明设备。
3. 工业与电力设备：充电桩、高频逆变电焊机、UPS 不间断电源、光伏逆变器、风电变流器。

Shape and Dimensions(dimensions are in mm) 外观与尺寸

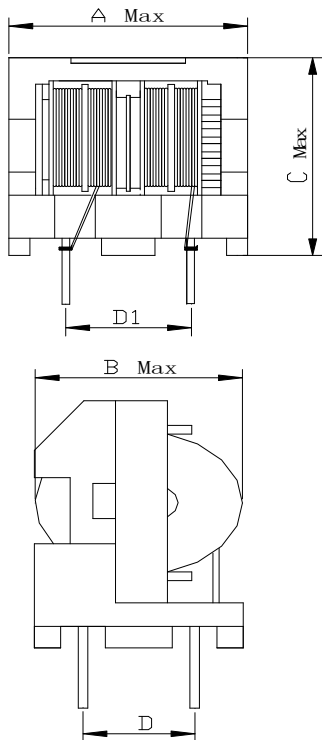

立式

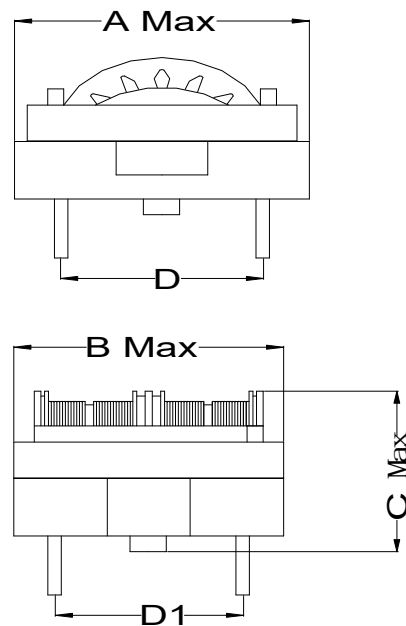

卧式

Spec 规格	A	B	C	D/D1	Inductance range 电感量范围	Operating voltage 工作电压	形状
ET20	27.0Max	21.5 Max	14.4Max	17/22.4	0.2mH-150mH	80V-280V	卧式
ET24	26.0Max	19.0 Max	30.5 Max	10/13	0.2mH-150mH	80V-280V	立式
ET28	30.5 Max	30.5 Max	25.4 Max	20/24	0.2mH-150mH	80V-280V	卧式
ET35	37.0 Max	37.5 Max	29.0 Max	25/30	0.2mH-150mH	80V-280V	卧式

<http://www.easehouse.com.hk>