

R Series

Features

1. Size: According to customer's installation requirements
 2. Operating voltage: 100V---230V
 3. Operating frequency: 50KHz--60KHz
 4. Power: 100W maximum
 5. Compliant with: UL, VDE, 3C, CQC
 6. Compliance: RoHS, REACH
- ★ Customizable According to Customer Requirements

Application areas

1. Power Supply: PD Power Supply, Outdoor Power Supply, Mobile Phone /Laptop Charger, LED Driver Power Supply, Computer Switching Power Adapter.
2. Household Appliances: TV, air Conditioner, Refrigerator, Audio Equipment, Lighting Equipment.
3. Industrial and Power Equipment: Charging Piles, High-Frequency Inverter Welding Machines, UPS Uninterruptible Power Supplies, Photovoltaic Inverters, and Wind Power Converters.

R 系列



功能特性

- 1.尺寸：根据客户安装需求
 - 2.工作电压：100V---230V
 - 3.工作频率：50KHz---60KHz
 - 4 功率：100W 最大
 - 5 符合：UL,VDE,3C,CQC
 - 6.符合：RoHS ,REACH
- ★可根据客户要求定制

应用领域

1. 电源：PD 电源、户外电源、手机/笔记本充电器、LED 驱动电源、电脑开关电源适配器。
2. 家用电器：电视、空调、冰箱、音响、照明设备。
3. 工业与电力设备：充电桩、高频逆变电焊机、UPS 不间断电源、光伏逆变器、风电变流器。

Shape and Dimensions(dimensions are in mm) 外观与尺寸

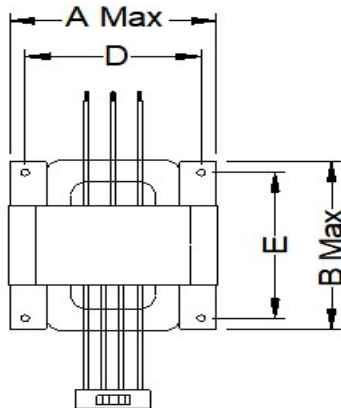

Spec 规格	A	B	C	D	E	Operating Frequency 工作频率	Power 功率
R10	59.0 Max	60.0 Max	20.0 Max	33.0±0.5	40.0±0.5	50kHz-60KHz	10-100W
R20	60.0 Max	61.0 Max	38.0 Max	40.0±0.5	41.0±0.5	50kHz-60KHz	10-100W
R50	70.0 Max	75.0 Max	42.0 Max	50.0±0.5	55.0±0.5	50kHz-60KHz	10-100W
R65	85.0 Max	90.0 Max	48.0 Max	65.0±0.5	70.0±0.5	50kHz-60KHz	10-100W