

ETD Series

Features

1. Size: According to customer's installation requirements
 2. Operating voltage: 3V---1000V
 3. Operating frequency: 20KHz---500KHz
 4. Power: 13KW maximum
 5. Compliant with: UL, VDE, 3C, CQC
 6. Compliance: RoHS, REACH
- ★ Customizable According to Customer Requirements

Application areas

1. Power Supply: PD Power Supply, Outdoor Power Supply, Mobile Phone /Laptop Charger, LED Driver Power Supply, Computer Switching Power Adapter.
2. Household Appliances: TV, air Conditioner, Refrigerator, Audio Equipment, Lighting Equipment.
3. Industrial and Power Equipment: Charging Piles, High-Frequency Inverter Welding Machines, UPS Uninterruptible Power Supplies, Photovoltaic Inverters, and Wind Power Converters.

ETD 系列



功能特性

- 1.尺寸：根据客户安装需求
 - 2.工作电压：3V---1000V
 - 3.工作频率：20KHz---500KHz
 - 4 功率：13KW 最大
 - 5 符合：UL,VDE,3C,CQC
 - 6.符合：RoHS ,REACH
- ★可根据客户要求定制



应用领域

1. 电源：PD 电源、户外电源、手机/笔记本充电器、LED 驱动电源、电脑开关电源适配器。
2. 家用电器：电视、空调、冰箱、音响、照明设备。
3. 工业与电力设备：充电桩、高频逆变电焊机、UPS 不间断电源、光伏逆变器、风电变流器。

Shape and Dimensions(dimensions are in mm) 外观与尺寸



立式

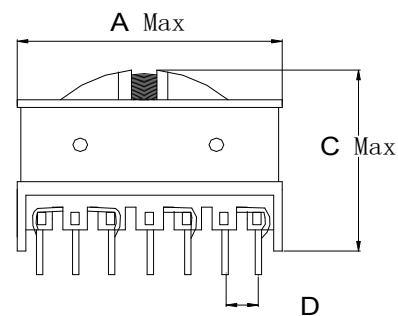

卧式

Spec 规格	A	B	C	D	E	Power 功率	形状
ETD29	37.0 Max	37.0 Max	27.0Max	5.0±0.5	25.8±0.5	13KW MAX	卧式
ETD34	41.0 Max	43.0 Max	35.0 Max	5.0±0.5	25.6±0.5	13KW MAX	卧式
ETD39	46.0 Max	29.0 Max	54.0 Max	5.0±0.5	24.5±0.5	13KW MAX	立式
ETD44	52.0 Max	52.0 Max	43.0 Max	5.0±0.5	35.8±0.5	13KW MAX	卧式
ETD49	56.0 Max	41.0 Max	61.0 Max	5.0±0.5	27.5±0.5	13KW MAX	立式
ETD54	64.0 Max	63.0 Max	48.0 Max	5.08±0.5	45.9±0.5	13KW MAX	卧式
ETD59	75.0 Max	48.0 Max	72.0 Max	5.1±0.5	35.5±0.5	13KW MAX	立式

<http://www.easehouse.com.hk>